

High Temperature Deep Cycle GEL Battery

HTL12-100

12V
Voltage

100Ah
Capacity

Gel
Technology

Deep
Cycle



The HTL deep cycle gel battery adopts the advanced developed nano gel electrolyte with super-C additive plus heavy duty plates design inside. It has a longer service life even deep cycle discharge use and can provide optimum and reliable service under extreme condition such as high temperature and frequent power failure, thus it is highly suited for tropical area in outdoor applications such as Telecom BTS stations and Off-grid PV system.

GENERAL FEATURES

- Able to operate at 40-60°C
- Integrated design to ensure the best uniformity and reliability
- Longer life and higher stability under high temp. environment (no air-con needed)
- Super-C additives: Deep discharge recovery capability, 1600cycles @50%DOD

APPLICATIONS


- BTS Stations
- Solar & Wind energy system
- UPS system
- Telecom systems
- Wheel chair, Golf cart

COMPLIED STANDARDS

IEC 60896-21/22 JIS C8704
IEC61427 BS6290 part4
GB/T 19638 CE/ISO

DIMENSIONS & WEIGHT

| | |
|------------------|---------|
| Length(mm) | 307±1 |
| Width(mm) | 169±1 |
| Height(mm) | 211±1 |
| Total Height(mm) | 216±1 |
| Weight(kg) | 30.5±3% |

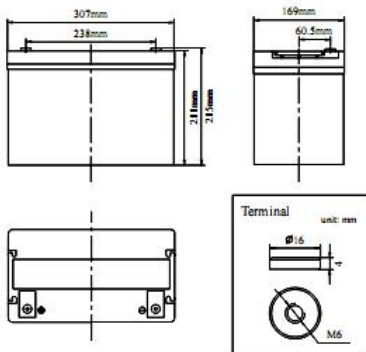

TECHNICAL SPECIFICATIONS

| | | |
|--|---------------------------|--|
| Nominal Voltage | | 12V (6 cells per unit) |
| Design Floating Life @25°C | | 20 Years |
| Nominal Capacity @25°C (20 hour rate@5.0A,10.8V) | | 100Ah |
| Capacity @25°C | 10hour rate (9.0A,10.8V) | 90Ah |
| | 5 hour rate (15.9A,10.5V) | 79.5Ah |
| | 1 hour rate (55.6A,9.6V) | 55.6Ah |
| Internal Resistance | Full Charged Battery@25°C | ≤5.3mΩ |
| Ambient Temperature | Discharge | -25°C~60°C |
| | Charge | -25°C~60°C |
| | Storage | -25°C~60°C |
| Max.Discharge Current@25°C | | 540A(5s) |
| Capacity affected by Temperature (10 hour) | 40°C | 108% |
| | 25°C | 100% |
| | 0°C | 90% |
| | -15°C | 70% |
| Self-Discharge@25°C per Month | | 3% |
| Charge (Constant Voltage) @25°C | Standby Use | Initial Charging Current Less than 22.5A Voltage 13.6-13.8V |
| | Cycle Use | Initial Charging Current Less than 22.5A Voltage 14.4-14.9V |

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)

| F.V/Time | 15min | 30min | 45min | 1h | 2h | 3h | 5h | 8h | 10h | 20h | 100h |
|----------|-------|-------|-------|------|------|------|------|------|-----|-----|------|
| 1.60V | 128.7 | 82.0 | 60.5 | 55.6 | 35.3 | 24.8 | 16.8 | 11.1 | 9.9 | 5.4 | 1.20 |
| 1.65V | 126.4 | 80.5 | 59.4 | 54.5 | 34.6 | 24.3 | 16.5 | 10.9 | 9.7 | 5.3 | 1.18 |
| 1.70V | 124.0 | 79.0 | 58.3 | 53.5 | 34.0 | 23.9 | 16.2 | 10.7 | 9.5 | 5.2 | 1.15 |
| 1.75V | 121.7 | 77.5 | 57.2 | 52.5 | 33.3 | 23.4 | 15.9 | 10.5 | 9.4 | 5.1 | 1.13 |
| 1.80V | 117.0 | 74.5 | 55.0 | 50.5 | 32.1 | 22.5 | 15.3 | 10.1 | 9.0 | 5.0 | 1.11 |

Discharge Constant Power per Cell (Watts at 25°C)







| F.V/Time | 15min | 30min | 45min | 1h | 2h | 3h | 5h | 8h | 10h | 20h | 100h |
|----------|-------|-------|-------|-------|------|------|------|------|------|------|------|
| 1.60V | 247.7 | 157.8 | 116.5 | 106.9 | 67.9 | 47.6 | 32.4 | 21.4 | 19.1 | 10.4 | 2.31 |
| 1.65V | 243.2 | 154.9 | 114.3 | 105.0 | 66.6 | 46.8 | 31.8 | 21.0 | 18.7 | 10.2 | 2.26 |
| 1.70V | 238.7 | 152.0 | 112.2 | 103.0 | 65.4 | 45.9 | 31.2 | 20.6 | 18.4 | 10.0 | 2.22 |
| 1.75V | 234.2 | 149.1 | 110.1 | 101.1 | 64.2 | 45.0 | 30.6 | 20.2 | 18.0 | 9.8 | 2.18 |
| 1.80V | 225.2 | 143.4 | 105.9 | 97.2 | 61.7 | 43.3 | 29.5 | 19.4 | 17.3 | 9.6 | 2.14 |

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **ZLPOWER** for the latest information.

High Temperature Deep Cycle GEL Battery

HTL12-100

PERFORMANCE CHARACTERISTICS

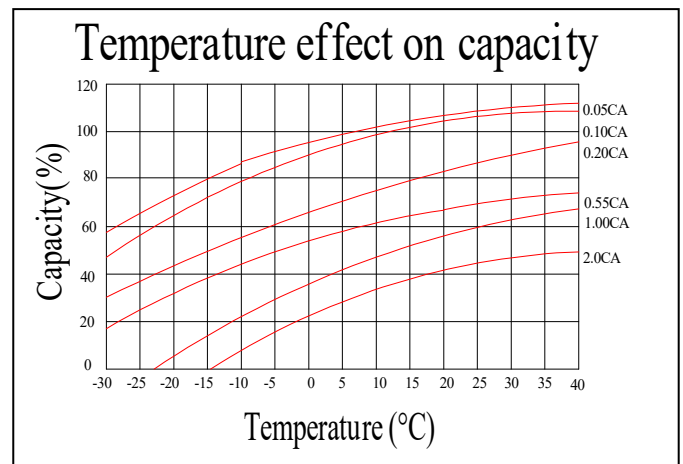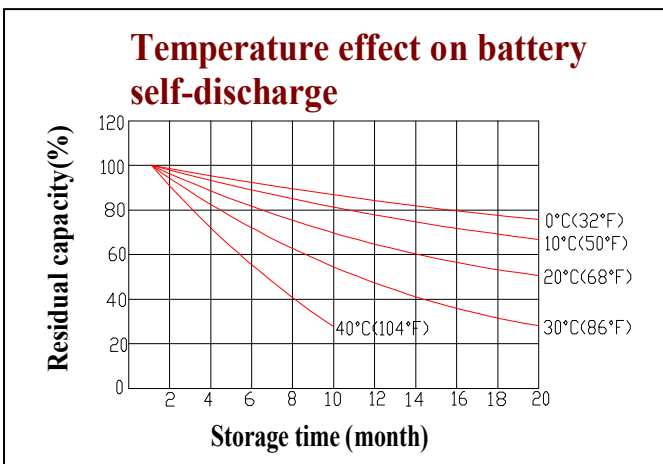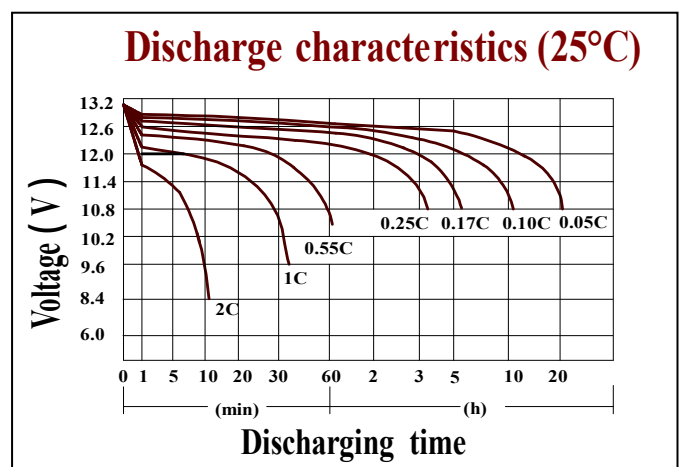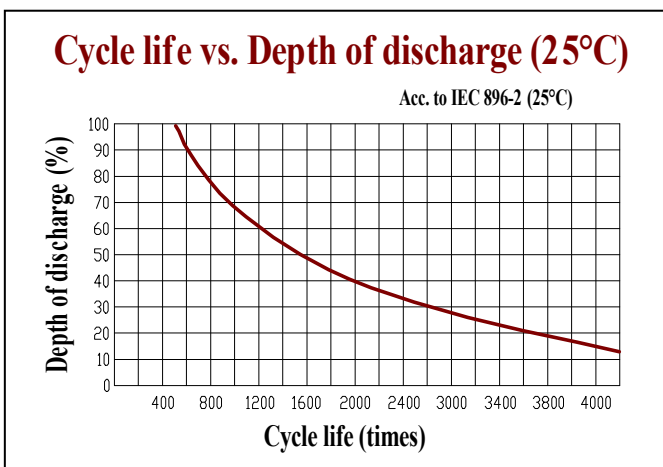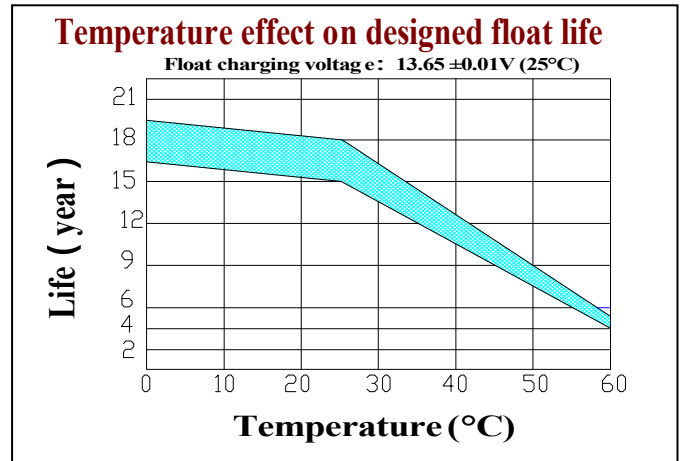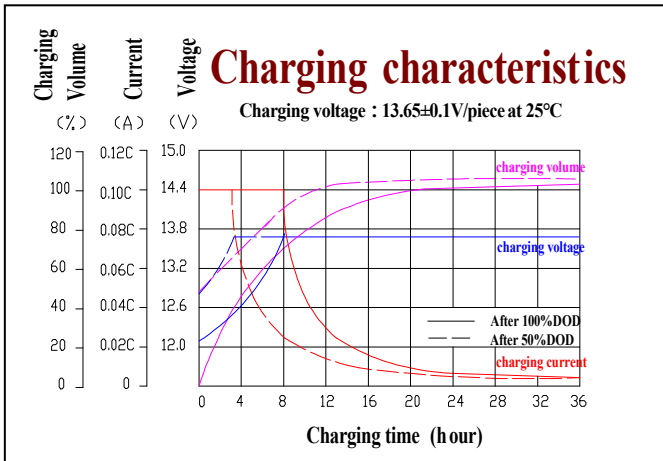

BATTERY CONSTRUCTION

| Component | Positive plate | Negative plate | Container & Cover | Safety valve | Terminal | Separator | Electrolyte | Pillar seal |
|-----------|--|---|---------------------------------------|--------------------------------------|-------------------------|---|---------------------------------|-----------------------------|
| Features | Thick high Sn low Ca grid with special paste | Balanced Pb-Ca grid for improved recombination efficiency | Fire resistant ABS (UL94-V0 optional) | Flame Si-Rubber and aging resistance | Female Copper Insert M6 | Advanced PVC /AGM separator for high pressure cell design | Silicon Gel import from Germany | Two layers epoxy resin seal |

Shenzhen ZLPOWER Electronics Co.,Ltd.

ADD: Building 2, Runteng Shangpai Industry Zone 1, Number 3, Yonghe Road, Shiyan town, Baoan District, Shenzhen, China



HTTP: //WWW.ZLPOWER.COM